

Remote-Condensed Ice Baggers Series

1030-R & 1070-R




- Produces up to 1933 lbs. of crescent ice cubes in 24 hours
- Ice storage up to 900 lbs
- Designed to conserve energy and water
- Innovative alert system to monitor performance
- Easy one-button, one-hour cleaning cycle
- All stainless-steel construction resists dirt and fingerprints
- Hands-free dispensing with foot pedal
- Remote condenser ensures quieter operation and flexible installation, even in non-climate controlled locations




Product Details

The Culligan Quench Remote-Condensed Ice Bagger Series is engineered to meet the high demands of commercial environments, offering reliable performance and user-friendly features. Its touchless foot pedal dispensing provides a hygienic, hands-free solution for quick and efficient ice dispensing, making it ideal for filling coolers or bagging your own ice. With production rates of up to 80.5 lbs. of crescent ice per hour and storage capacities of up to 900 lbs.*, this system also features an energy- and water-saving CycleSaver design and EverCheck™ alert system to ensure operational efficiency and prompt issue notifications. The remote condenser allows for quieter operation and more flexible installation in areas with high temperatures, limited space, or ventilation challenges. Constructed with durable stainless steel, it resists dirt and fingerprints for easy cleaning, while a simple one-button, one-hour cleaning cycle streamlines maintenance. These features make the Remote-Condensed Ice Bagger Series the ultimate choice for flexible and high-performance ice dispensing needs.

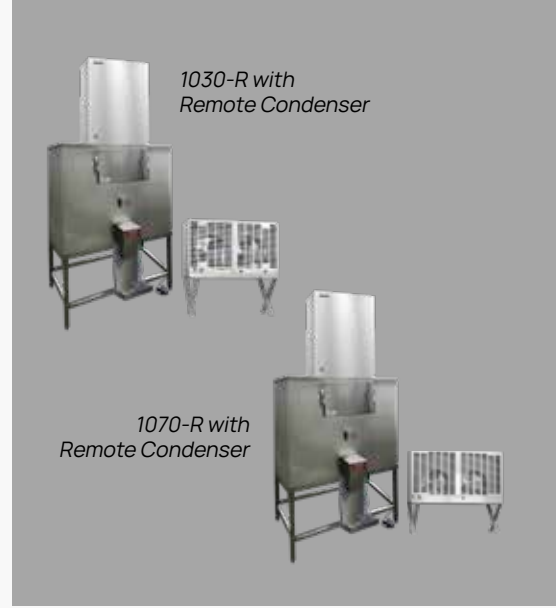

Remote-Condensed Ice Bagger Series Features:

- Produces up to 57 lbs./hr (1030-R) & 80.5 lbs./hr (1070-R) of ice.*
- Stores up to 650 lbs. (1030-R) & 900 lbs. (1070-R) of ice.
- CycleSaver design conserves energy and water while ensuring peak machine performance.
- EverCheck™ alert system monitors performance and promptly notifies users of any issues.
- One-button, one-hour cleaning cycle simplifies maintenance.
- R-404A refrigerant ensures reliable and consistent ice production in commercial environments.
- Touchless foot pedal dispensing provides a hygienic, hands-free solution.
- Stainless-steel exterior resists fingerprints and is easy to clean.
- Remote-condenser system provides quieter operation and increased installation flexibility.



Culligan Quench products are certified by independent authorized 3rd party laboratories in accordance of appropriate industry standards. To find out more about which certification your product may have, please contact us.

Specifications

	1030-R	1070-R
Ice Type	Crescent	Crescent
Ice Bagger Dimensions	119.5"h x 34.25"w x 46"d / 303.53 cm h x 87 cm w x 117 cm d	114.5"h x 48.25"w x 46"d / 291 cm h x 123 cm w x 117 cm d
Remote Condenser Dimensions	36.5"h x 35.6875"w x 14.0625"d / 92.71 cm h x 90.6 cm w x 35.7 cm d	40.5"h x 46.375"w x 14.0625"d / 102.87 cm h x 117.78 cm w x 35.71 cm d
Dispensing Area	17"	17"
Ice Bagger Weight	795 lbs/360.6 kg	965 lbs/ 437.3 kg
Remote Condenser Weight	100 lbs/45.4 kg	130 lbs / 59 kg
Ice Production per 24 hrs*	1371 lbs	1933 lbs
Ice Storage Capacity	650 lbs	900 lbs
Recommended Water Pressure	10 – 113 psig	10 – 113 psig
Electrical Requirements**	(1)115V/60/1 standard outlet, (1) 208-230V/60/1 NEMA 14-20R w/20A dedicated circuit	(1)115V/60/1 standard outlet, (1) 208-230V/60/1 NEMA 14-30R w/30A dedicated circuit
Icemaker/Bagger Storage Amperage	15.9A/10.8A	15.9A/10.8A
Power Consumption**	4.28 kWh	3.90 kWh
Drain Requirement	Needs to be installed within 10 feet of a drain	
Ice Bagger Clearance Needed	Allow 12"/30.5 cm at rear, sides and top	
Remote Condenser Clearance Needed	Allow 24"/61cm clearance on all sides for circulation. Remote condenser should not be more than 33 feet above the Icemaker or no more than 10 feet below it	
Model Number	1030-R	1070-R

* Ice production can change based on source water and ambient air temperature. The specifications listed are for 70° air and 50° F water source temperature. Culligan Quench recommends that installation location ambient air temperature averages 45° F - 100° F and water source temperature averages 45° F - 90° F.

** Remote condensers voltage/frequency (115V/60) power is supplied by the Ice Bagger. Power consumption listed is per 100 lbs. of ice in 90°F air temperature/70° F source water. If drain pump is required (1) additional 115V/60/1 standard outlet will be required.