


1030-R

Remote-Condensed Ice Bagger



- Produces up to 1371 lbs of crescent ice cubes in 24 hours*
- Ice storage up to 650 lbs
- Designed to conserve energy and water
- Hands-free dispensing with foot pedal
- Monitor performance with innovative alert system
- Easy one-button, one-hour cleaning cycle
- All stainless-steel construction resists dirt and fingerprints
- Remote condenser ensures quieter operation and flexible installation, even in non-climate controlled locations.
- Optional ice shoot dispensing or cooler stand



Product Details



The 1030-R is engineered to meet the high demands of commercial environments in climate sensitive environments with production rates of up to 57 lbs of crescent ice per hour and storage capacities of up to 650 lbs*. Its touchless foot pedal dispensing provides a hygienic, hands-free solution for quick and efficient ice dispensing, making it ideal for filling coolers or bagging your own ice. This system also features an energy- and water-saving CycleSaver design and EverCheck™ alert system to ensure operational efficiency and prompt issue notifications. The 1030-R's remote condenser allows for quieter operation and more flexible installation in areas with high temperatures, limited space, or ventilation challenges. Constructed with durable stainless steel, it resists dirt and fingerprints for easy cleaning, while a simple one-button, one-hour cleaning cycle streamlines maintenance.



1030-R Features:

- Produces up to 57 lbs/hr* of crescent shaped ice with storage for up to 650 lbs of ice+
- Touchless foot pedal provides hygienic, hands-free dispensing into coolers or ice bags
- CycleSaver design conserves energy and water while ensuring peak machine performance
- EverCheck™ alert system monitors performance and promptly notifies users of any issues
- Stainless steel exterior and one-button, one-hour cleaning cycle simplifies daily maintenance
- R-404A refrigerant ensures reliable and consistent ice production in commercial environments
- Remote-condenser system provides quieter operation and increased installation flexibility
- Alternative storage options available as a 700 lb. capacity scoopable bin (1035-R) or a 900 lb capacity scoopable bin (1045-R) for locations with standard ceiling heights <10 ft

Culligan Quench products are certified by independent authorized 3rd party laboratories in accordance of appropriate industry standards. To find out more about which certification your product may have, please contact us.

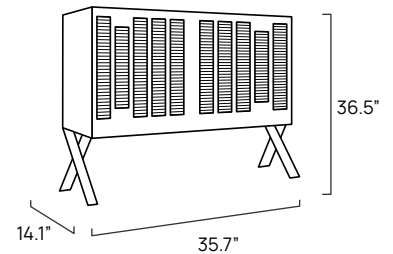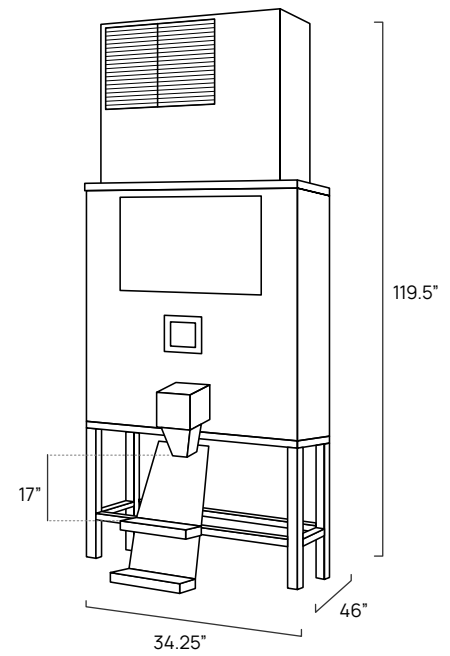

Specifications

	1030-R	1035-R	1045-R
Ice Type	Crescent	Crescent	Crescent
Ice Bagger Dimensions	119.5" h x 34.3" w x 46" d / 303.5 cm h x 87 cm w x 117 cm d	87.5" h x 44" w x 32.5" d / 222.3 cm h x 111.8 cm w x 82.5 cm d	87.5" h x 52" w x 32.5" d / 222.3 cm h x 132.1 cm w x 82.5 cm d
Remote Condenser Dimensions	36.5" h x 35.7" w x 14.1" d / 92.71 cm h x 90.6 cm w x 35.7 cm d	36.5" h x 35.7" w x 14.1" d / 92.71 cm h x 90.6 cm w x 35.7 cm d	36.5" h x 35.7" w x 14.1" d / 92.71 cm h x 90.6 cm w x 35.7 cm d
Dispensing Area	17"	N/A	N/A
Dispense Type	Bagger	Scoop	Scoop
Ice Bagger Weight	795 lbs / 360.6 kg	464 lbs / 210.5 kg	484 lbs / 219.5 kg
Remote Condenser Weight	100 lbs / 45.4 kg	100 lbs/45.4 kg	100 lbs/45.4 kg
Ice Production per 24 hrs* (70°F air / 50°F water)	1371 lbs	1371 lbs	1371 lbs
Ice Storage Capacity	650 lbs	700 lbs	900 lbs
Recommended Water Pressure	10 – 113 psig	10 – 113 psig	10 – 113 psig
Electrical Requirements**	(1)115V/60/1 standard outlet, (1) 208-230V/60/1 NEMA 14-20R w/20A dedicated circuit	(1)115V/60/1 standard outlet, (1) 208-230V/60/1 NEMA 14-20R w/20A dedicated circuit	(1)115V/60/1 standard outlet, (1) 208-230V/60/1 NEMA 14-20R w/20A dedicated circuit
Icemaker/Bagger Storage Amperage	15.9A/10.8A	15.9A/14.0A	15.9A/14.0A
Power Consumption ⁺	4.28 kWh	4.54 kWh	4.54 kWh
Drain Requirement	Install is required to be within 10 ft of drain		
Ice Bagger Clearance Requirement	Allow 24" / 61 cm at sides & top. Allow 12" / 30.5 cm at rear.		
Remote Condenser Clearance Requirement	Allow 24"/61 cm clearance on all sides for circulation. Remote condenser placement is required to be within 33 ft above the icemaker and no greater than 10 ft below it.		
Model Number	1030-R	1035-R	1045-R

*Ice production can change based on source water and ambient air temperature. The specifications lists are for 70° F air and 50° F water source temperature. Culligan Quench recommends that installation location ambient air temperature averages 45 - 90° F and water source temperature averages 45 - 80° F.

**If drain pump is required, (1) additional 115V/60/1 standard outlet will be required.

+Per 100 lbs of ice in 90° F air temperature/70° F source water